
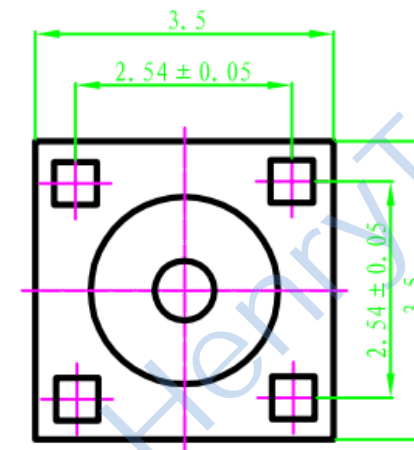


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

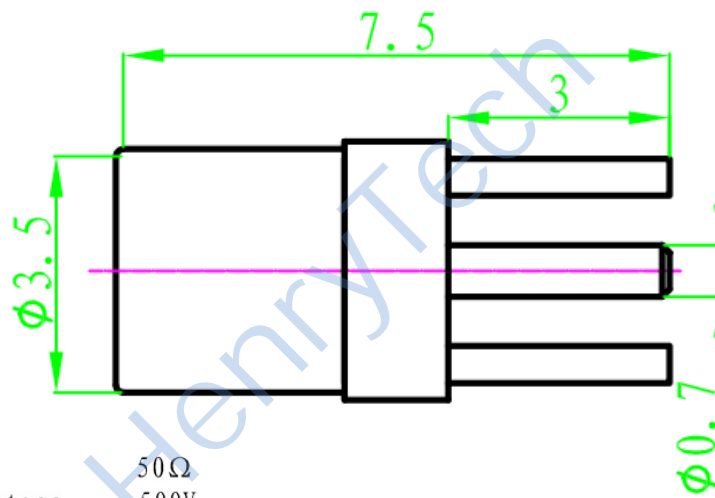

Electrical Characteristics

Impedance	50Ω
Dielectric withstanding voltage	500V
Center contact resistance	10 MΩ
Outer contact resistance	5 MΩ
Insulation resistance:	1000 MΩ
Working voltage:	170V (rms)

Material&Plating

Body	Brass, gold Plating
Center contact	Beryllium copper, gold plating
Insulators	PTFE

Environmental Characteristics

Temperature range	-40℃ ~ +90℃
-------------------	-------------

Mechanical Characteristics

Durability	500 cycles
------------	------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:

RF Coaxial Connector
MMCX Female Conn. For
PCB

PART NO: HL-MMCX-KHD



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------