
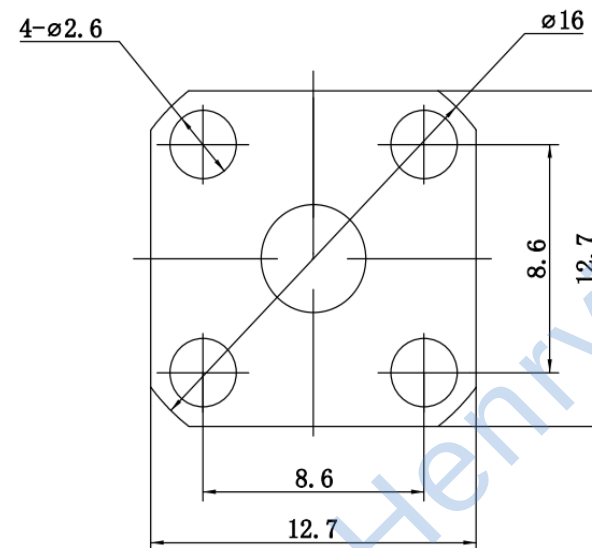


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	19/03/17	19/03/17

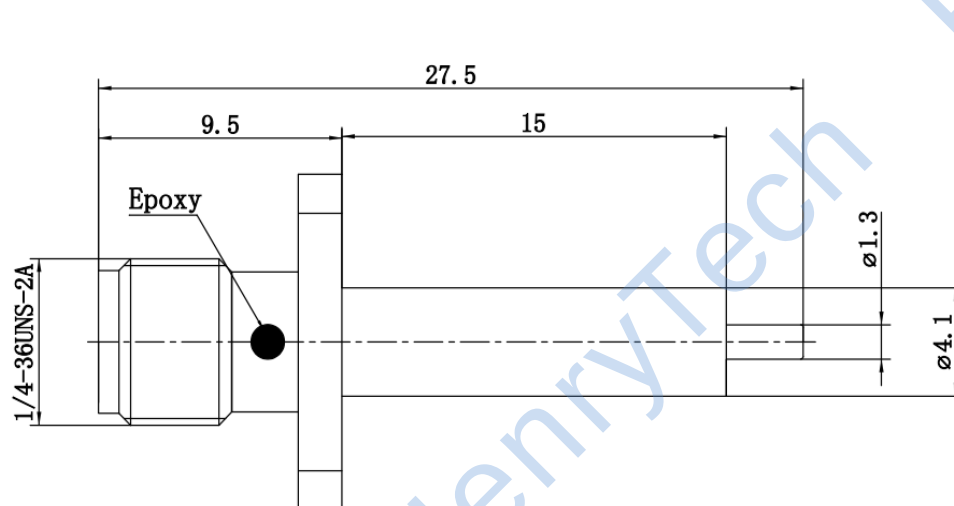

1 Electrical

- | | |
|-------------------------------------|---------------------------|
| 1.1 Impedance | 50 Ω |
| 1.2 Frequency | DC~18GHz |
| 1.2 Dielectric withstanding voltage | 1000V(volts RMS) |
| 1.3 Center contact resistance | $\leq 3\text{M}\Omega$ |
| 1.4 Outer contact resistance | $\leq 2\text{M}\Omega$ |
| 1.5 Insulation resistance: | $\geq 5000\text{M}\Omega$ |
| 1.6 VSWR | 1.25:1 |

2 Environmental&Mechanical

- | | |
|-----------------------|-------------|
| 2.1 Temperature range | -55℃~155℃ |
| 2.2 RoHs Compliant | Yes |
| 2.3 Durability | >500 cycles |

3 Materials&plating

- | | |
|------------------|--------------------------------|
| 3.1 Body: | Brass; Gold, plated |
| 3.2 Insulator: | Teflon |
| 3.3 Contact Pin: | Beryllium Copper; Gold, plated |

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:
RF Coaxial Connector
SMA Female Flange
Connector Mount

PART NO: HL-SMA-KFD22A



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------