This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

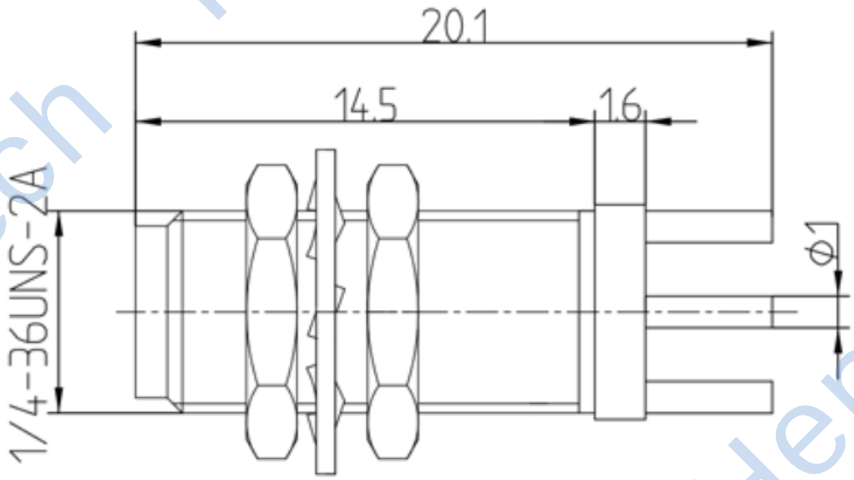

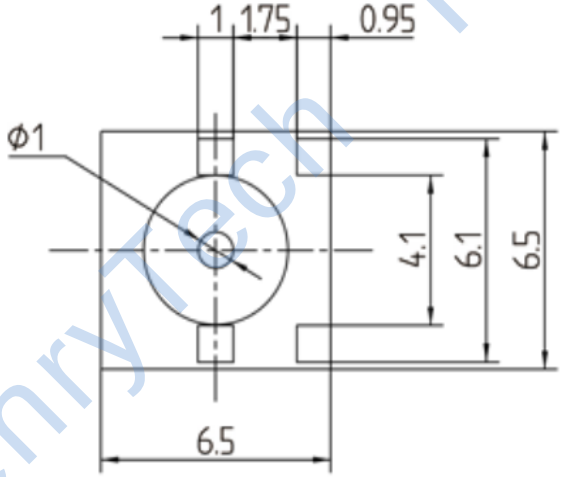

1. Electrical
1.1 Impedance: 50ohm
1.2 Frequency: DC-6GHz
1.3 VSWR: 1.20:1
1.4.Insulation resistance: ≥5000MΩ
1.5 Dielectric withstanding voltage: 500V(rms)
1.6 Center Contact resistance≤ 3MΩ
1.7 Outer contact ≤ 2MΩ

2 Material&Finish
2.1 Inner Contact: Beryllium copper, gold plated
2.2 Outer Contact: brass, gold plated
2.3 Insulators: PTFE

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector SMA Female Bulkhead Conn. for PCB	HenryTech	
ENGINEER: L. yu 19/03/17		DIMENSION IN MILLIMETERS (mm)	
APPROVED: W. yi 19/03/17			
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-SMA-KYHDC6	SIZE: A4 / SCALE: N/A / SHEET: 1/1 / REV: A	

HenryTech