


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

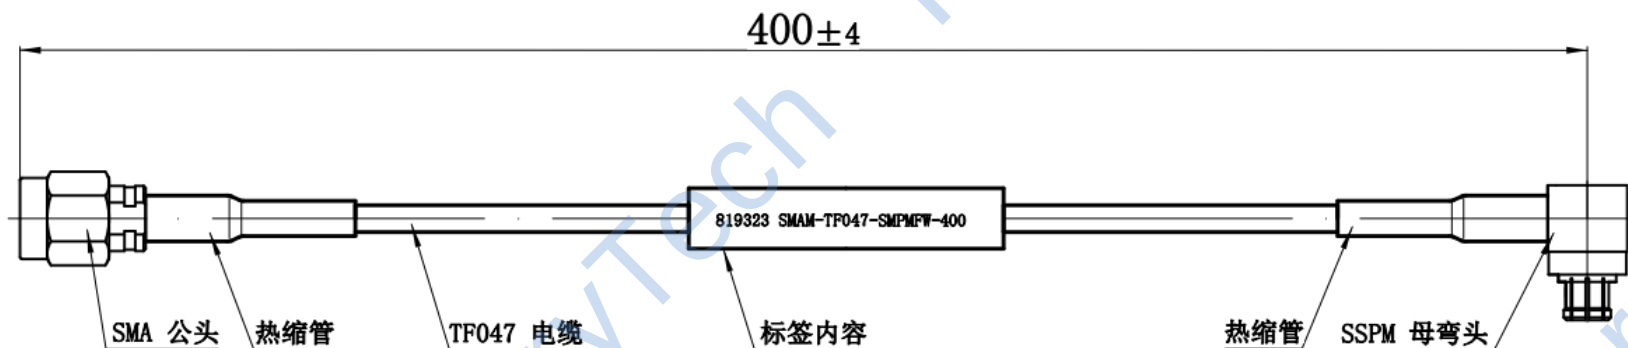

1 电气性能

- 1.1 特性阻抗: 50 Ω
- 1.2 使用频率: DC-4.5GHz
- 1.3 驻波比: 1.15:1
- 1.4 插损: ≤1.6dB
- 1.5 绝缘电阻: ≥5000MΩ
- 1.6 介质耐压: 750V (AC)

2 机械性能

- 2.1 电缆弯曲半径: 10mm (单次), 20mm (多次)
- 2.2 寿命: 大于100次

3 连接器1 SMA-JB1AG

- 3.1 内导体: 黄铜、镀金
- 3.2 外导体: 黄铜、镀三元
- 3.3 绝缘体: PTFE
- 3.4 螺套: 不锈钢, 钝化

4 连接器1 SMPM-KWB1.37-3

- 4.1 内导体: 铜青铜、镀金
- 4.2 外导体: 铜青铜、镀金
- 4.3 绝缘体: PTFE

5 使用环境

- 5.1 工作温度 -40° C to 105° C

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17		TITLE: Cable Assembly SMA Male to SMPM Female R/A for TF047 Cable Length 400mm				
ENGINEER: L.yu 19/03/17			 DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.yi 19/03/17						
TOLERANCES UNLESS OTHERWISE SPECIFIED						
X ±0.50						
.X ±0.20						
.XX ±0.10						
ANGLES ±1°						
PART NO: HL-SMAM-TF047-SMPMFW-400MM			SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A